

NOTE 13 ADDED	7	25/2/41
TERMINAL NOS CHANGED	6	6/9/71
TERMINALS ADDED, RETRACTED	5	6/1/90
NOTE 2 CHANGED	4	4/1/57
Q.O. OF TA REVERSED	3	4/05/60
NOTE 12 ADDED BT WAS 250A	2	3/9/58
AMENDMENT PARTICULARS	1	
EL LTD BEESTON, NOTTINGHAM, ENGLAND		
ING DEPT APPROVED		
CHECKED WIRE		
ENGINEER		
945601 SW		
24V E		
50 LINE PAX		
TIE LINE WITH PREFERENCE		
ACCESS & PREFERENCE		
DISCRIMINATION		

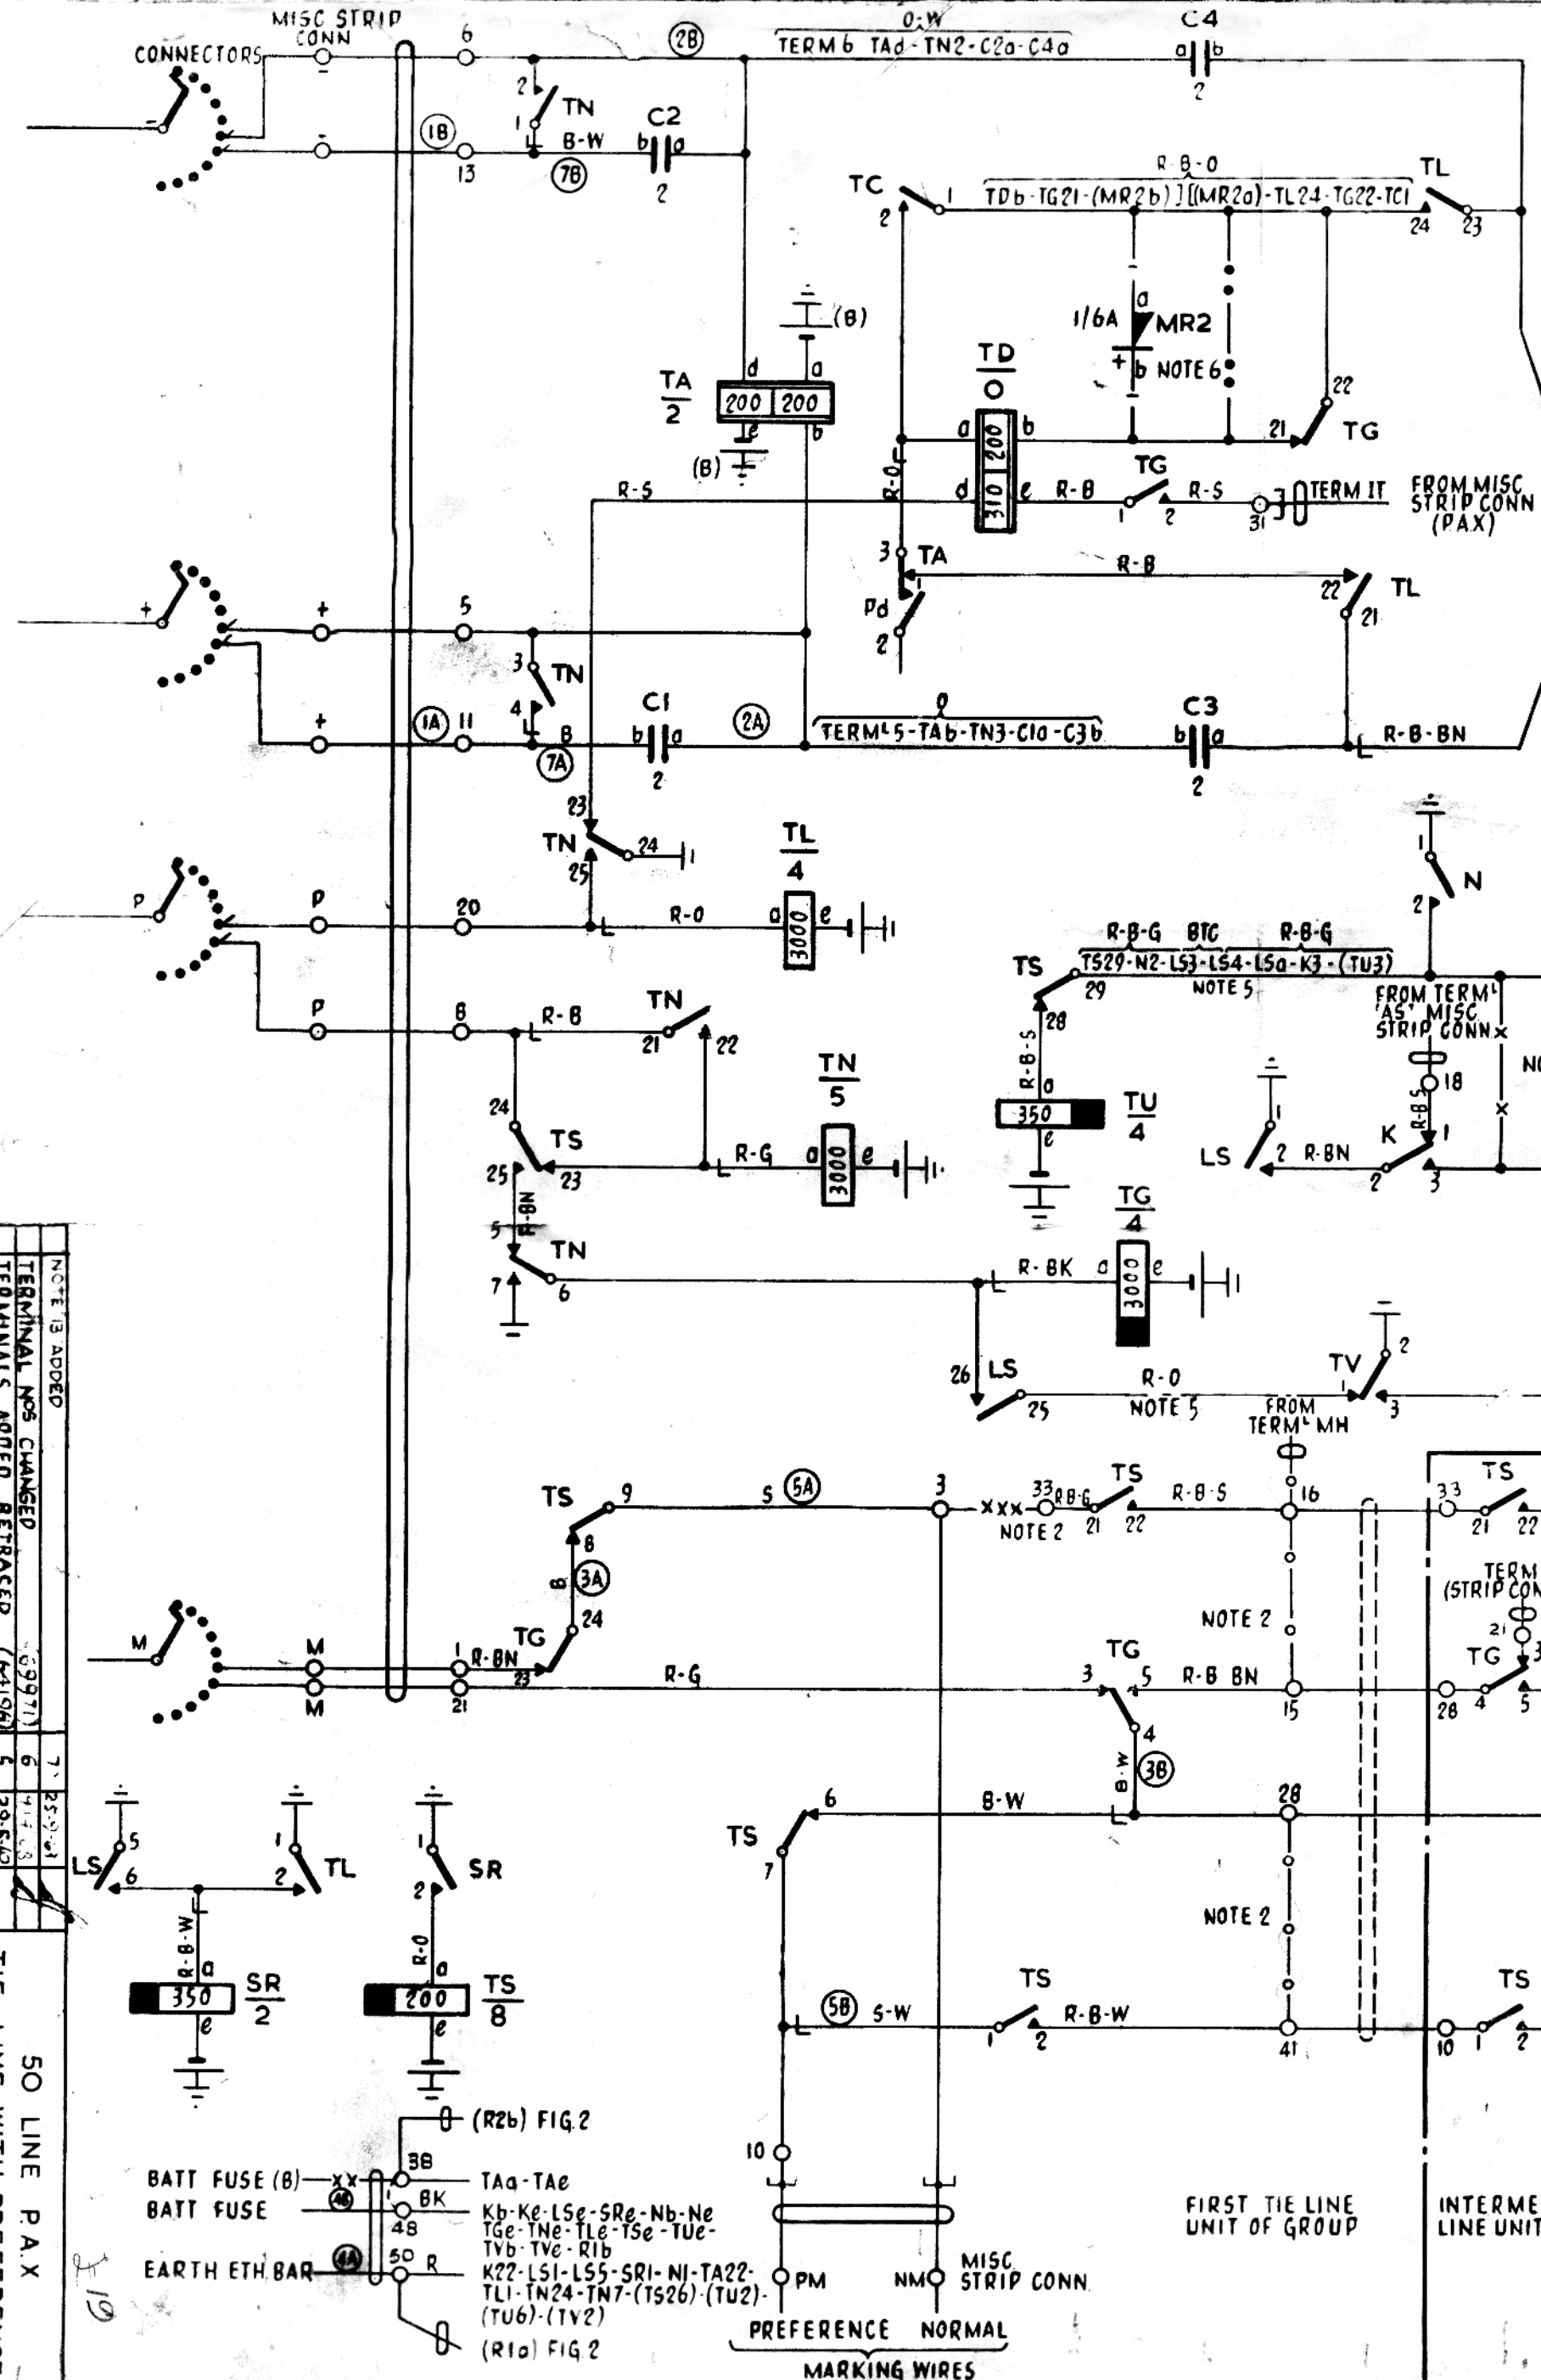


FIG. 1  
TIE LINE


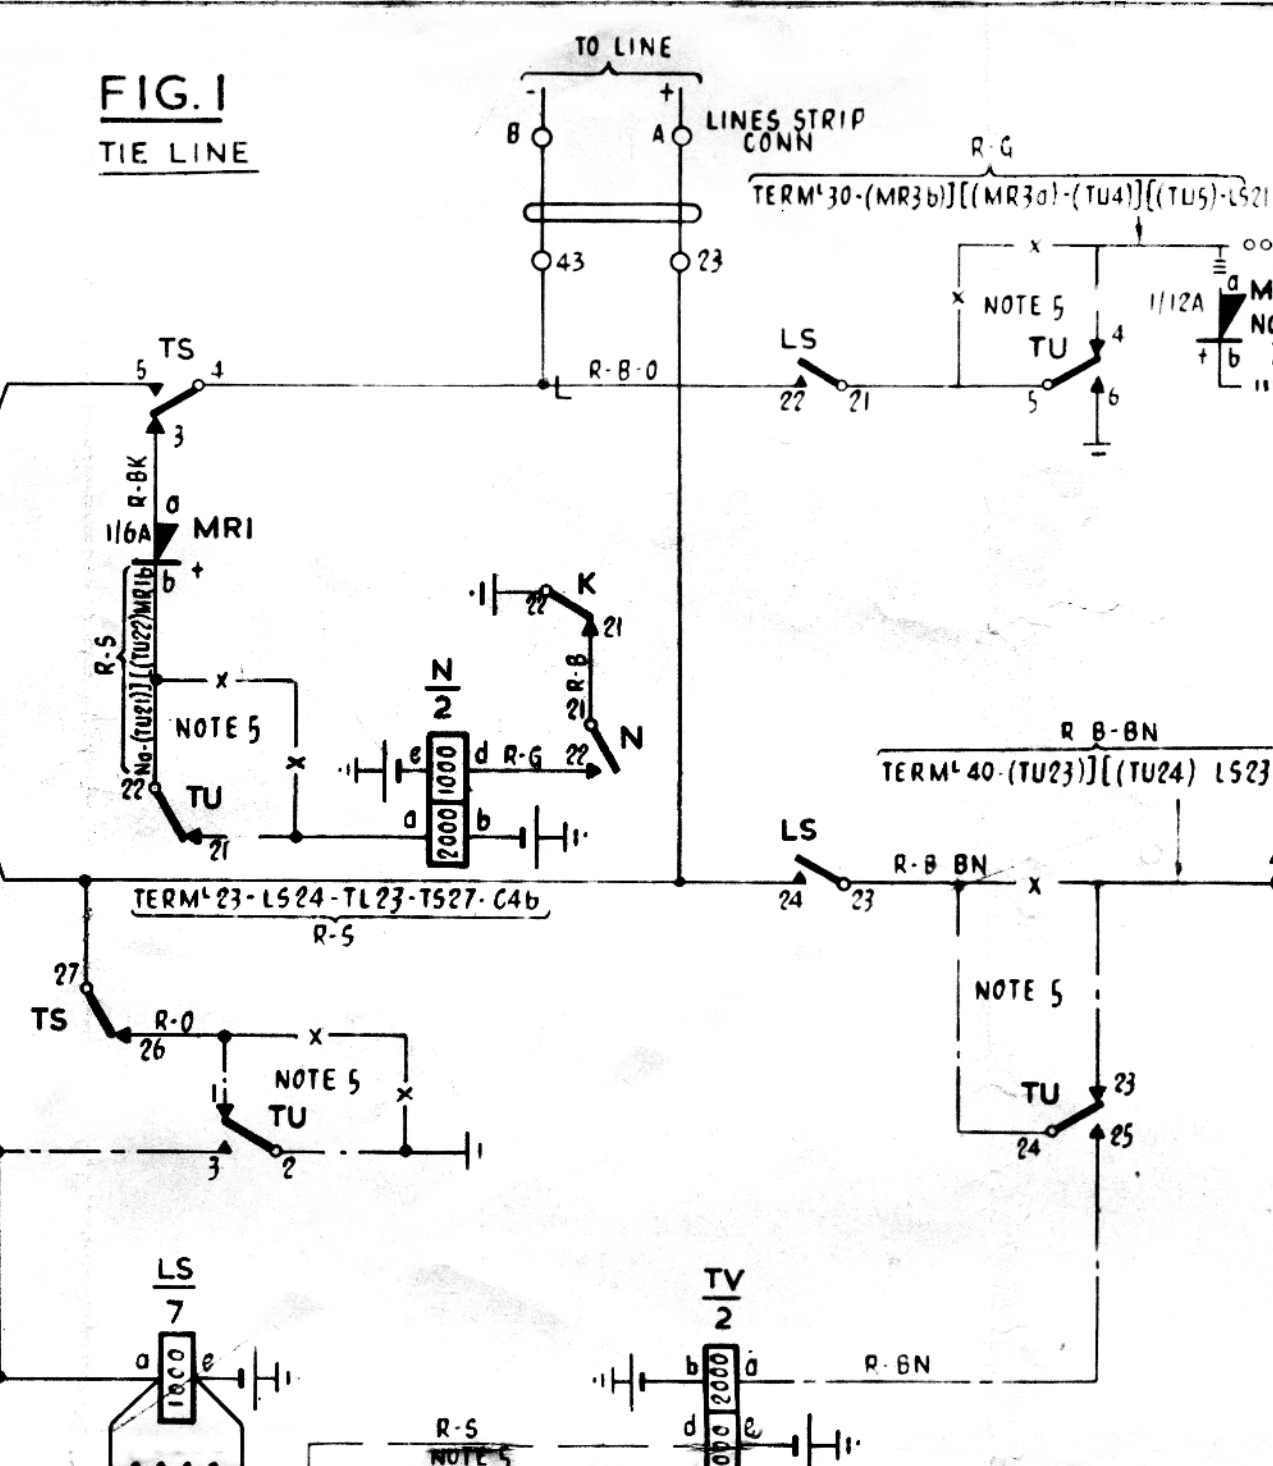


FIG. 3 MODIFICATION TO MISC. STRIP CONN.

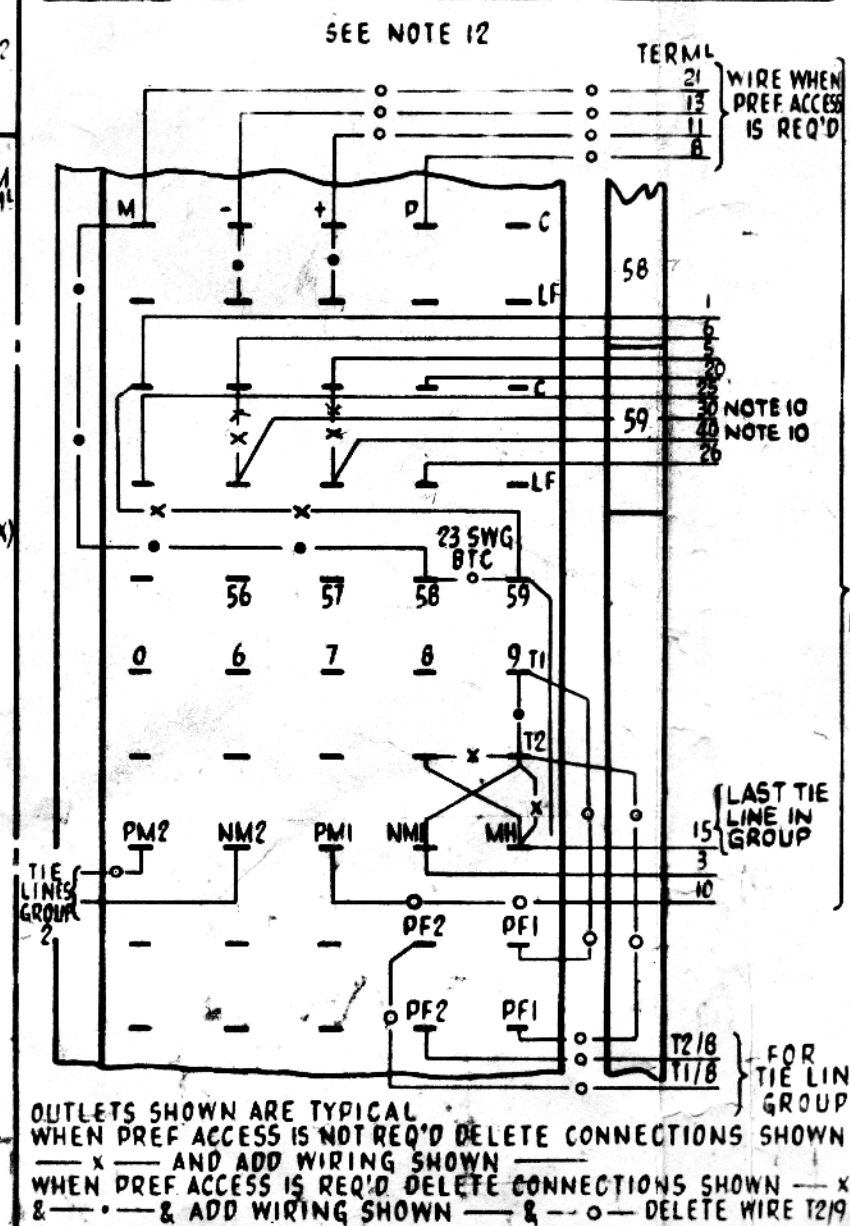

NOTES

1. FUSING: 1.5A PER CCT
2. CONNECTIONS SHOWN -XXX- & -O- ARE NORMALLY WIRED. DELETE -O- WHEN THE LINE IS FIRST OR INTERMEDIATE IN A GROUP & -XXX- WHEN OTHER THAN FIRST
3. TO PROVIDE PREFERENCE ACCESS FIT RELAY 'PF' IN EACH REGISTER
4. WHEN GENERAL INCOMING PREFERENCE IS NOT REQUIRED DELETE CONNS SHOWN THUS
5. WHEN INCOMING PREFERENCE DISCRIMINATION IS REQUIRED EQUIP RELAYS TV & TU ADD CONNECTIONS SHOWN THUS & DELETE THOSE SHOWN THUS X DISCONNECT EARTH (R) FROM TS26 & CONNECT EARTH TO TU2 ADD CONNECTION TS26-TU1 DISCONNECT CONNECTION LS3-LS4
6. WHEN OUTGOING PREFERENCE DISCRIMINATION IS REQUIRED EQUIP RECTIFIER MR2 ADD CONNS SHOWN THUS -I- & DELETE CONNS SHOWN THUS -I-
7. FIT RECTIFIER MR3 WHEN DISTANT TIE LINE IS 50V WORKING ADD CONNS SHOWN THUS -I- AND DELETE CONNS SHOWN THUS -I-
8. (B) SIGNIFIES SMOOTHED SUPPLY WHEN SUPPLY IS SMOOTHED THROUGHOUT DELETE CONNS SHOWN THUS -XX- & ADD CONNS SHOWN THUS -XX-
9. LOOPS ON RELAYS TV & TU & ON MR2 ARE NOT TO BE CUT UNTIL SAID DELAYS & RECTIFIERS ARE FITTED
10. WHEN EQUIPMENT TO FIG 2 IS FITTED DELETE CONNS SHOWN THUS -I- & ADD CONNS SHOWN THUS -I-
11. ALL WIRE TO BE 25 SWG UNLESS OTHERWISE SPECIFIED
12. ON LINES USED FOR TIE LINE WORKING DISCONNECT & REMOVE LINE RELAY IF FITTED, BATT & ETH LEADS TO BE JOINED & TAPED
13. DESIGNATION IN BRACKETS APPLY WHEN TR IS 422363 WITHOUT

EXPLANATORY ONLY